

LP-2



ACCESSORIES


LP-2

AUXILIARY SWITCH

PASSION

EXPERIENCE

RELIABLE CONSTRUCTIONS

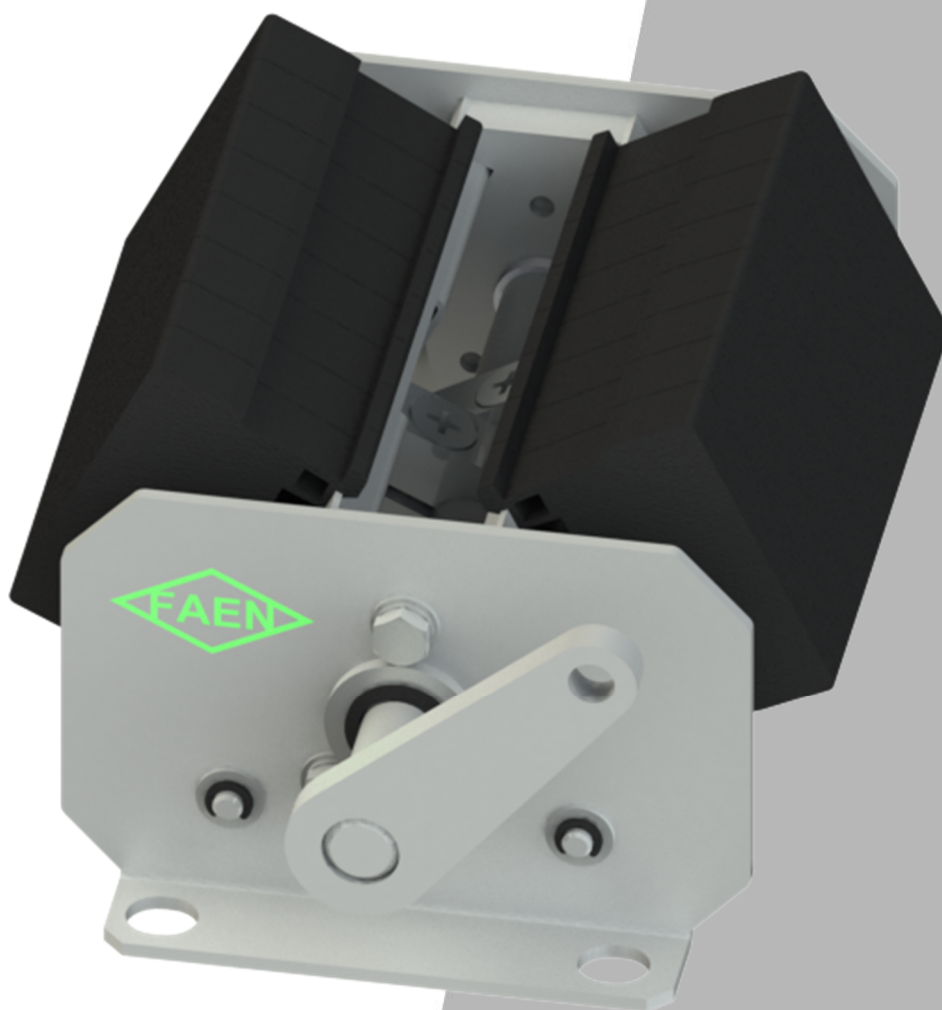




SPECIFICATION


- Works with apparatus from various manufacturers;
- Configurable contact trip angle;
- Modular design;
- Ideal replacement for depleted equipment;
- Possibility to use NO or NC signals;
- Available configurations having 4, 6, 8, 10, 12, 16 or 20 contacts;
- Possibility of cooperation with MV and LV switchgear automation;
- High switching capacity;
- Reliable performance;
- A solution tailored to the needs of industrial power generation;

TECHNICAL DATA

No.	Parameter	Value	
1.	Rated insulation voltage	500 [V]	
2.	Rated continuous current	10 [A]	
3.	Rated switching currents	AC-15 220 [V] – 2,6 [A] 380 [V] – 1,6 [A] 500 [V] – 1,6 [A]	DC-13 24 [V] – 4 [A] 110 [V] – 1 [A] 220 [V] – 0,25 [A]
4.	Number of switching cycles - for rated switching parameters - during DC electromagnets switching - during AC electromagnets switching	200.000 cycles 1.000.000 cycles below 10 [W] 1.000.000 cycles below 80 [VA]	
5.	Rated angle of operation	90 [°]	
6.	Operating angle adjustment range	70 ÷ 110 [°]	
7.	Working position	depending on customer's needs	
8.	Permissible cross-section of connection wires	1,5 [mm ²]	
9.	Operating temperature	-5 ÷ +50 [°C]	

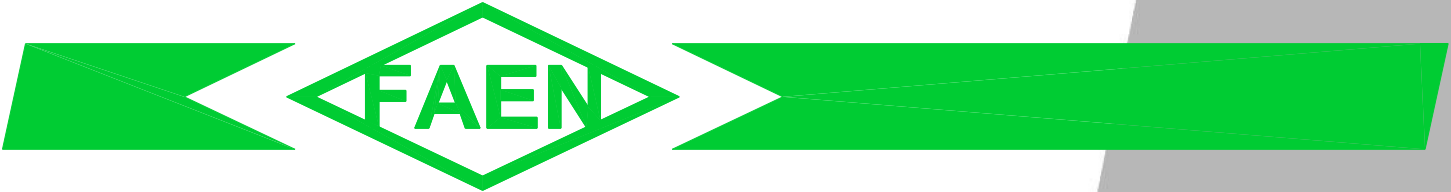

DIMENSIONAL DRAWING

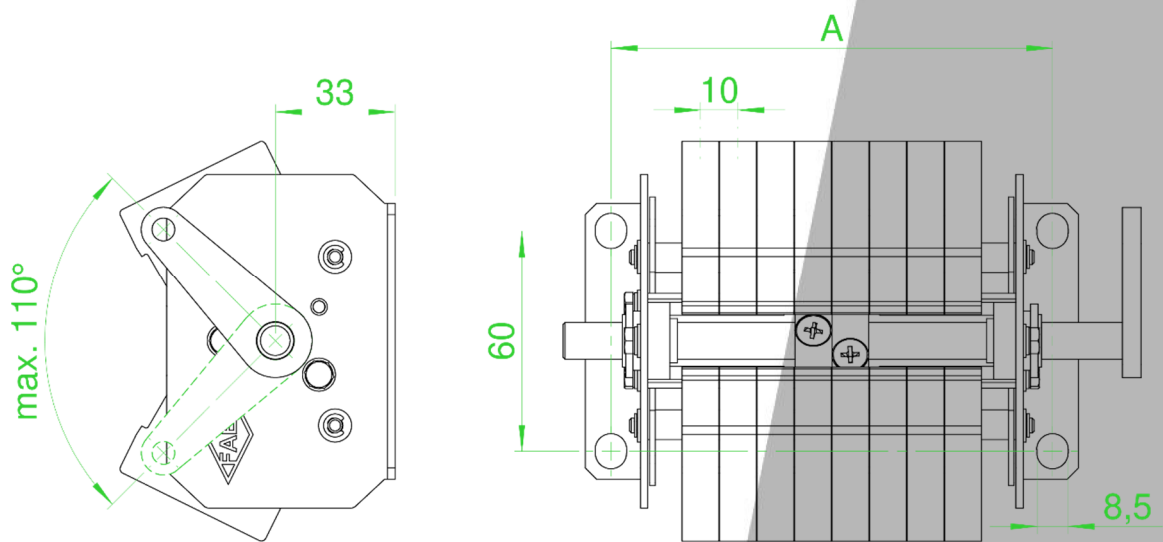

Number of contacts	4	6	8	10	12	16	20
A [mm]	80	120			200		240



NOTES

CONTACT

Fabryka Aparatów Elektrycznych i Napędów Sp. z o.o.

Email: biuro@faen.com.pl

Telephone: +48 59 725 56 52

Adress: ul. Dworcowa 6K, 84-351 Nowa Wieś Lęborska, Poland