

NL-1



MEDIUM VOLTAGE EQUIPMENT

NSL-70

ELECTRICAL LINEAR DRIVE



PASSION

EXPERIENCE

RELIABLE CONSTRUCTIONS




SPECIFICATION


- Powder-coated aluminum housing;
- Easy maneuverability;
- Possibility of use with apparatus from various manufacturers;
- Adjusting the extension height;
- Electrical diagram adapted to the customer's requirements;
- Available in several supply voltages;
- Possibility of remote, local or emergency - manual control.


TECHNICAL DATA

No.	Parameter	Value
1.	Rated motor voltage	24 [VDC] 110 [VDC] 220 [VDC] 230 [VAC]
2.	Heater	220 [VDC] 230 [VAC] 110 [VDC]
3.	Rated power	300 [W]
4.	Maximum linear force	6500 [N]
5.	Operational time	~ 5 [sec.]
6.	Protection level of the housing	IP 55
7.	Mechanical durability	10000 cycles

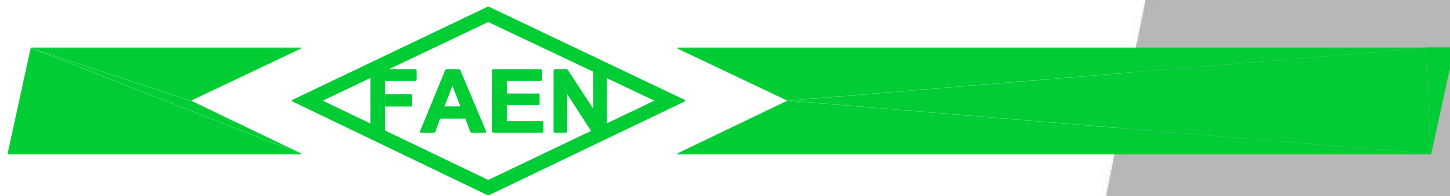

DIMENSIONAL DRAWING

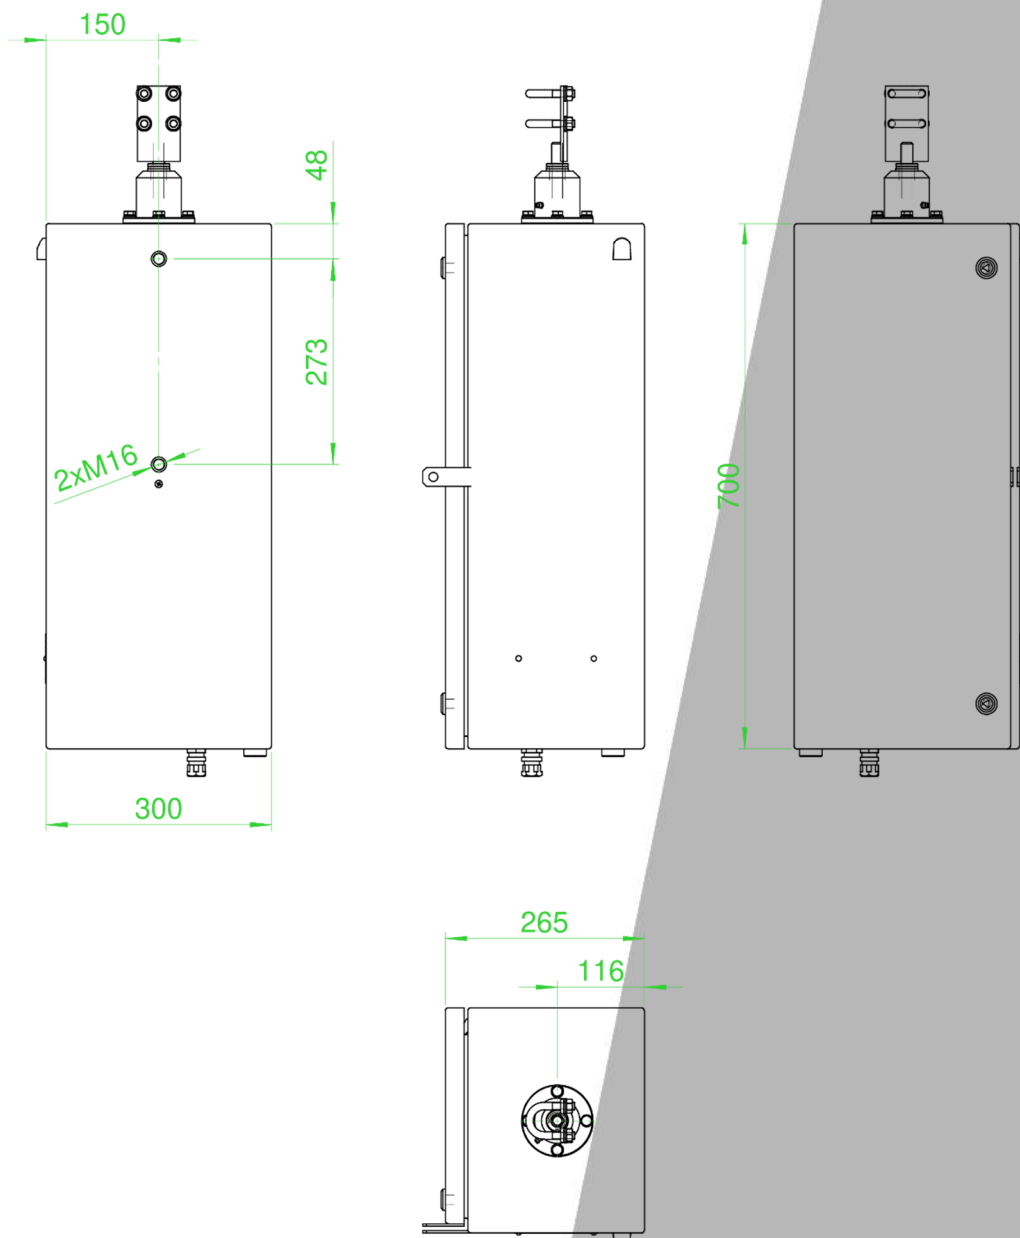

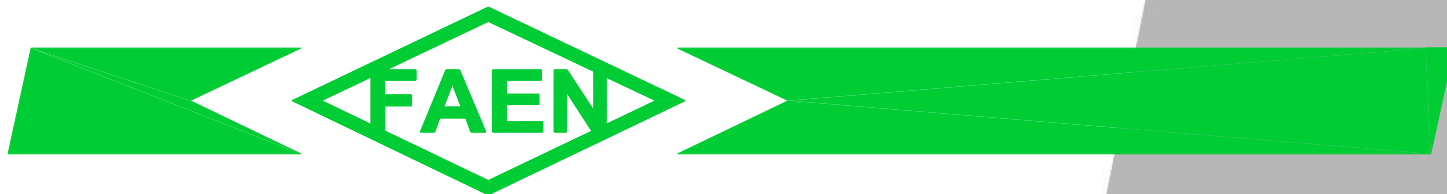

NOTES

CONTACT

Fabryka Aparatów Elektrycznych i Napędów Sp. z o.o.

Email: biuro@faen.com.pl

Telephone: +48 59 725 56 52

Aderess: ul. Dworcowa 6K, 84-351 Nowa Wieś Lęborska, Poland